


BeRamp

BeRamp has been designed for adapting your rubber tiles perfectly to a specific zone and offering a smooth transition, avoiding possible problems for users.

Although our rubber tiles are very heavy, it is convenient to use the ramps for zones where the tiles don't touch any walls and could eventually move.

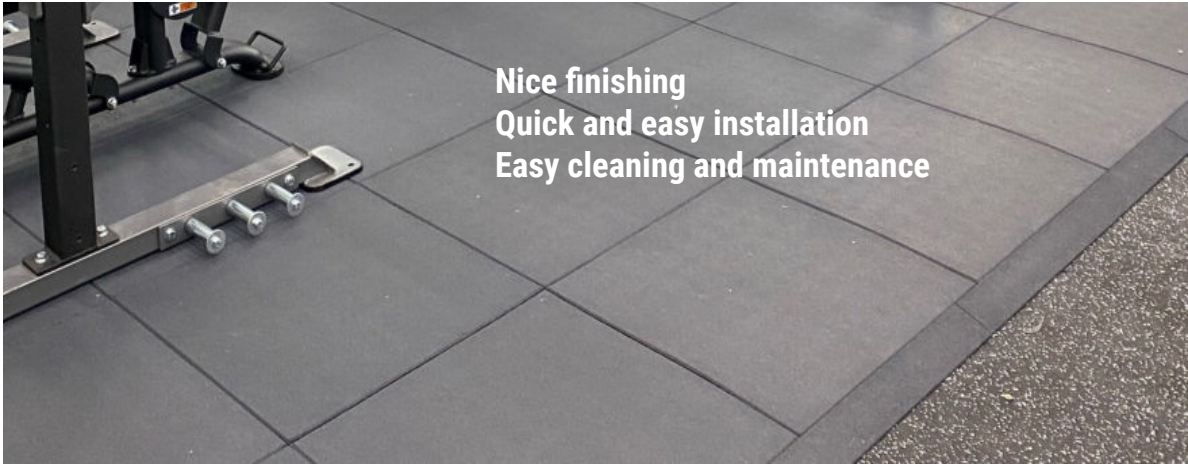

COMPOSITION

Recycled SBR Rubber, MDI polyurethane bonding agent.

SPECIFICATIONS

Use	Indoor
Ramp Dimensions	100x23cm
Thickness (tolerance)	25mm-5mm / 20mm-5mm (5%)
Color	■
Surface	Slightly porous, soft, smooth
Density	920-950 kgs/m ³

This TDS is for information purposes only and Beka Sport may change the specifications of this TDS without prior notice.
Beka Sport will not be responsible for any misuse of this TDS.
The latest version of this TDS can be found on the website www.bekarubber.com